

INSTALLATION INSTRUCTIONS FOR REAR

TAIL LIGHT KIT. PART NO. 120624.

Locate the gasket on the rear battery cover using the dimensions given in Fig. 1. Using the gasket for a template, drill two $1/4$ " holes for mounting and one $5/16$ " hole for the wires.

Pass the wires for the light down through the center hole just drilled. Secure the light assembly and gasket on the rear battery cover with the 8-32 x $7/8$ " screws, washers, lockwashers and nuts provided.

Fasten the wires with the cable tie provided as indicated in Fig. 2. Provide a loop so the cover can be opened without pulling the leads. Pass the wire through the tractor body along with the existing wiring. Place a wire clip on the end of each wire and fasten the wires to headlight wires 21 and 32 under the chassis.

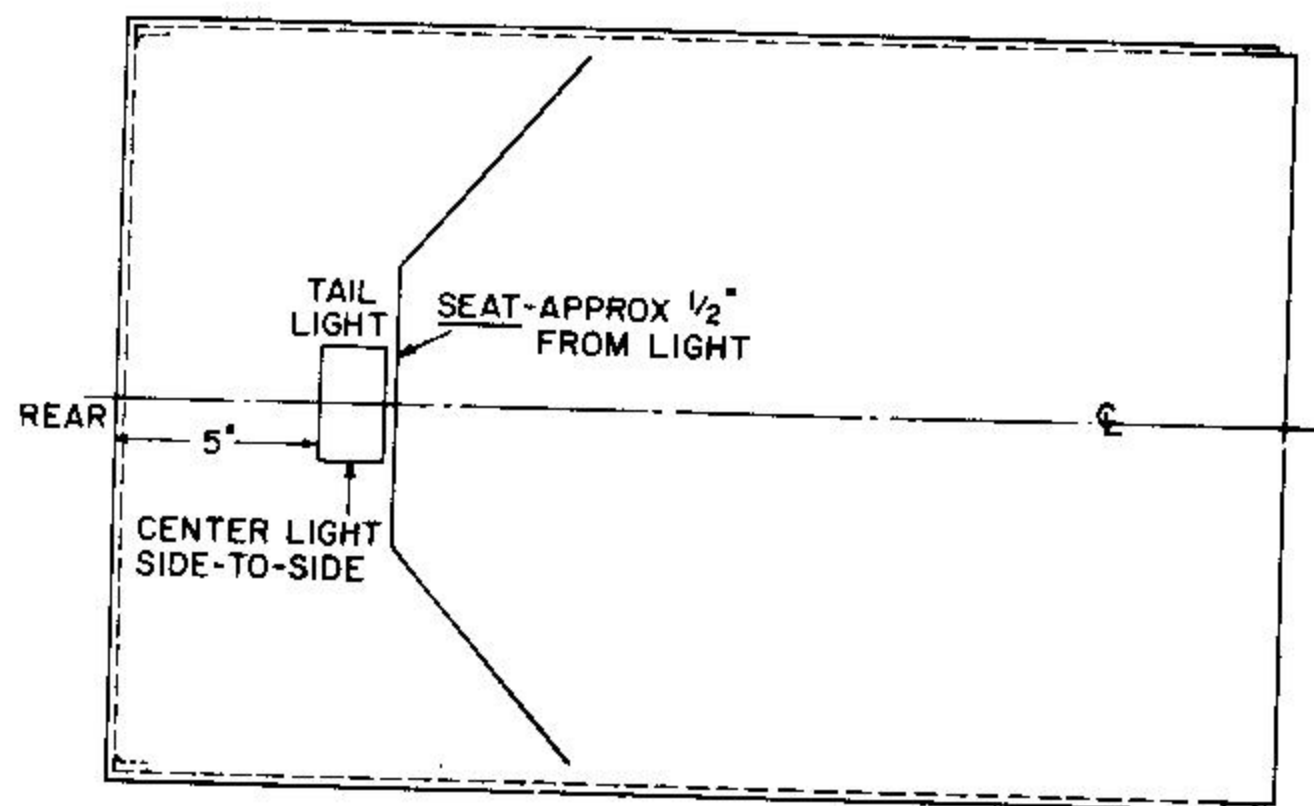


Figure 1

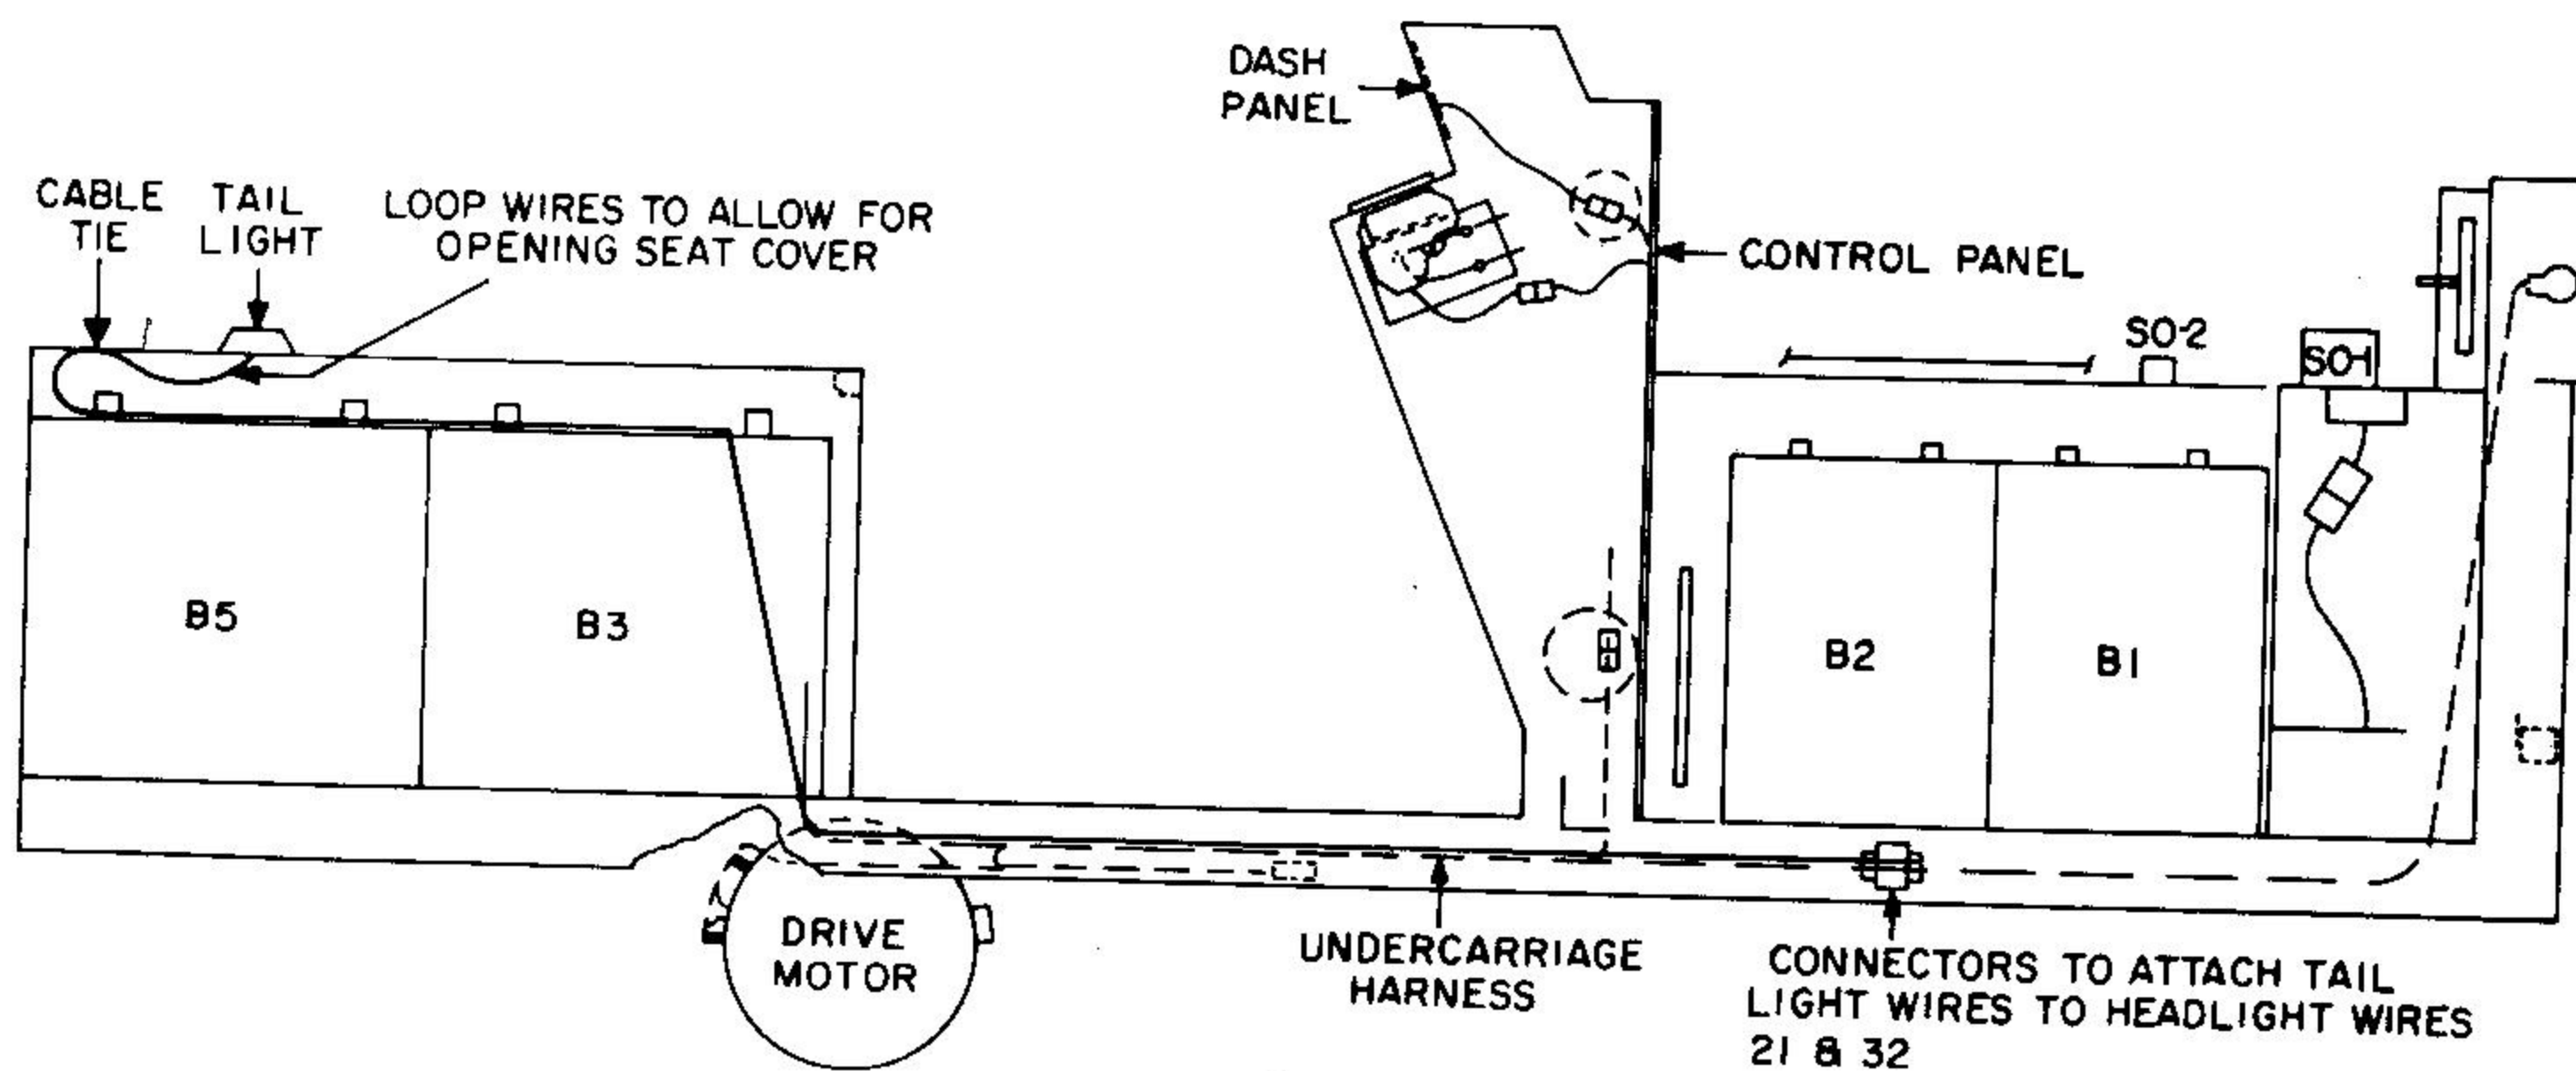


Figure 2

985847

To use the self-stripping U-connectors provided, push the connector with the open top over the proper wire (either No. 21 or No. 32). Insert a tail light wire in the lower opening of the connector. Squeeze the connector with pliers before closing the cover. Close the cover around the connector. (See Fig. 3.) Repeat the procedure for the other wire.

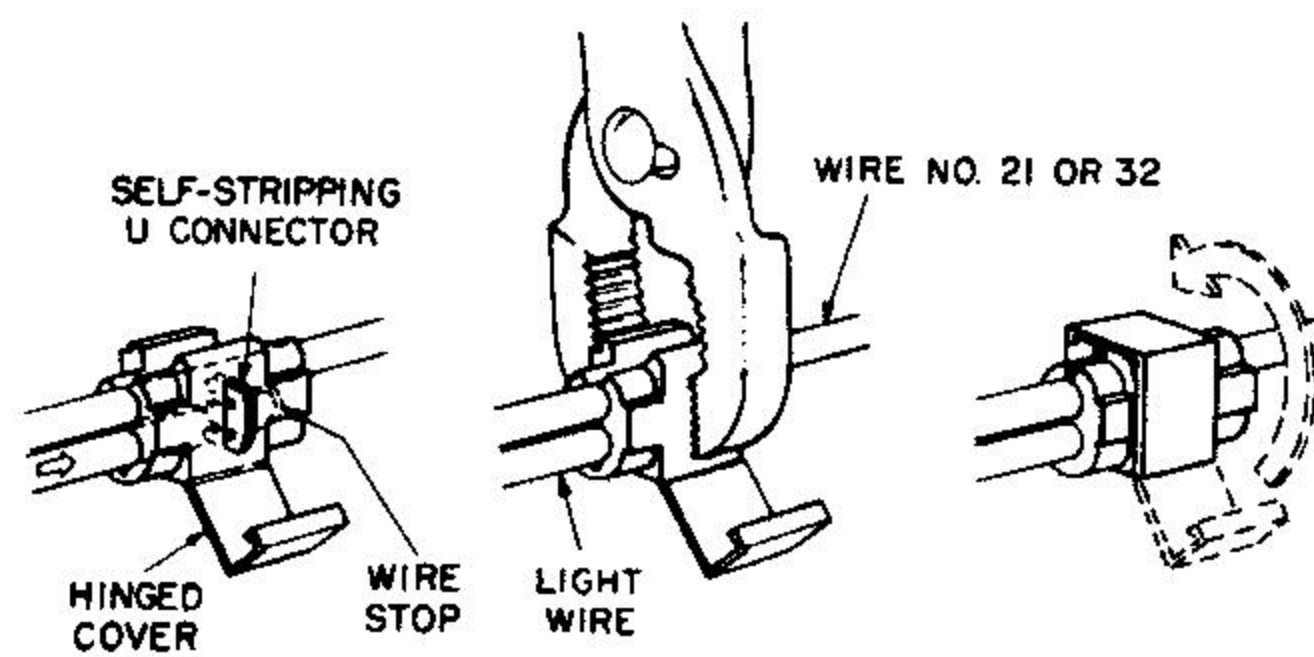


Figure 3