


Installation Instructions for installing reinforcement rings
on mower motors for all 42" mid-mount mowers - both side & rear discharge



Be Careful!

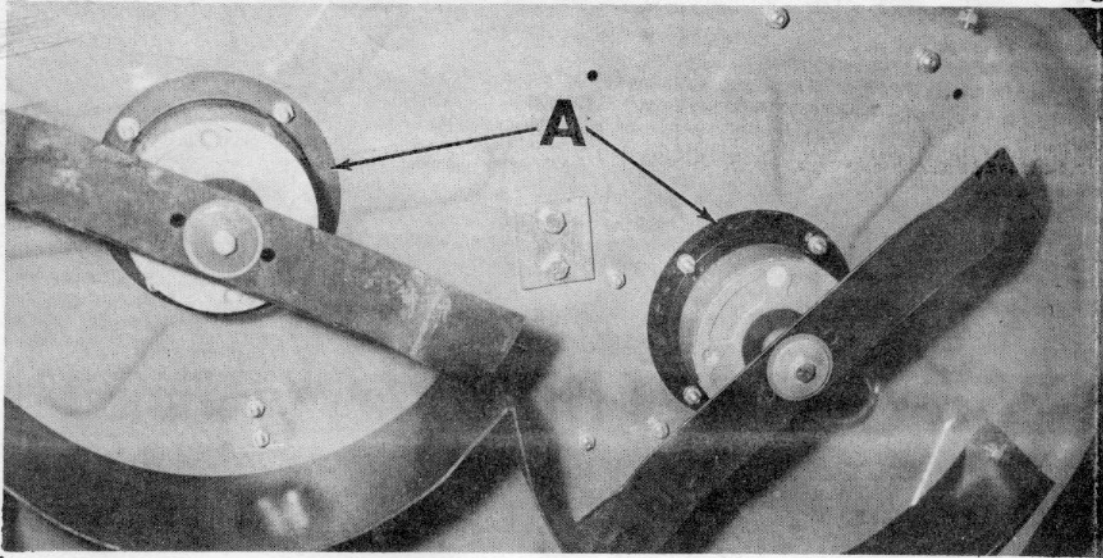

Disconnect the power cord plug from the tractor to the mower. Remove the mower from the tractor as described in the Operator's Manual. Then proceed as follows:

Tilt the mower up as shown. Remove nuts securing motors to case and install reinforcement rings "A" on all three motors. Tighten bolts securely.

On units that are retail - check blades for proper installation and being sharp.