



Electrak[®]

Tractor

INSTRUCTIONS

TAIL LIGHT Model AP70

GEH-3957

PARTS

The Elec-Trak rear tail light kit AP70 contains the following parts:

Part	Qty
Tail Light with Bulb	1
Gasket	1
Wire Clip	2
Cable Tie	1
8-32 x 7/8" screw	2
#8 Washer	2
#8 Lockwasher	2
8-32 Hex Nut	2

INSTALLATION

Locate the gasket on the rear battery cover using the dimensions given in Fig. 1. Using the gasket for a template, drill two 1/4" holes for mounting and one 5/16" hole for the wires.

Pass the wires for the light down through the center hole just drilled. Secure the light assembly and gasket on the rear battery cover with the 8-32

x 7/8" screws, washers, lockwashers and nuts provided.

Fasten the wires with the cable tie provided as indicated in Fig. 2. Provide a loop so the cover can be opened without folding the leads. Pass the wire through the tractor body along with the existing wiring. Place a wire clip on the end of each wire and fasten the wires to headlight wires 21 and 32 under the chassis.

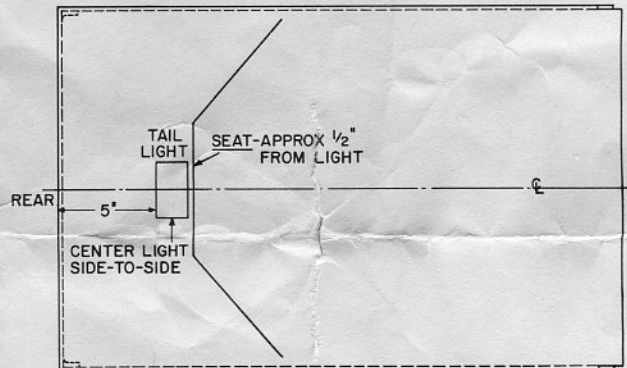


Figure 1

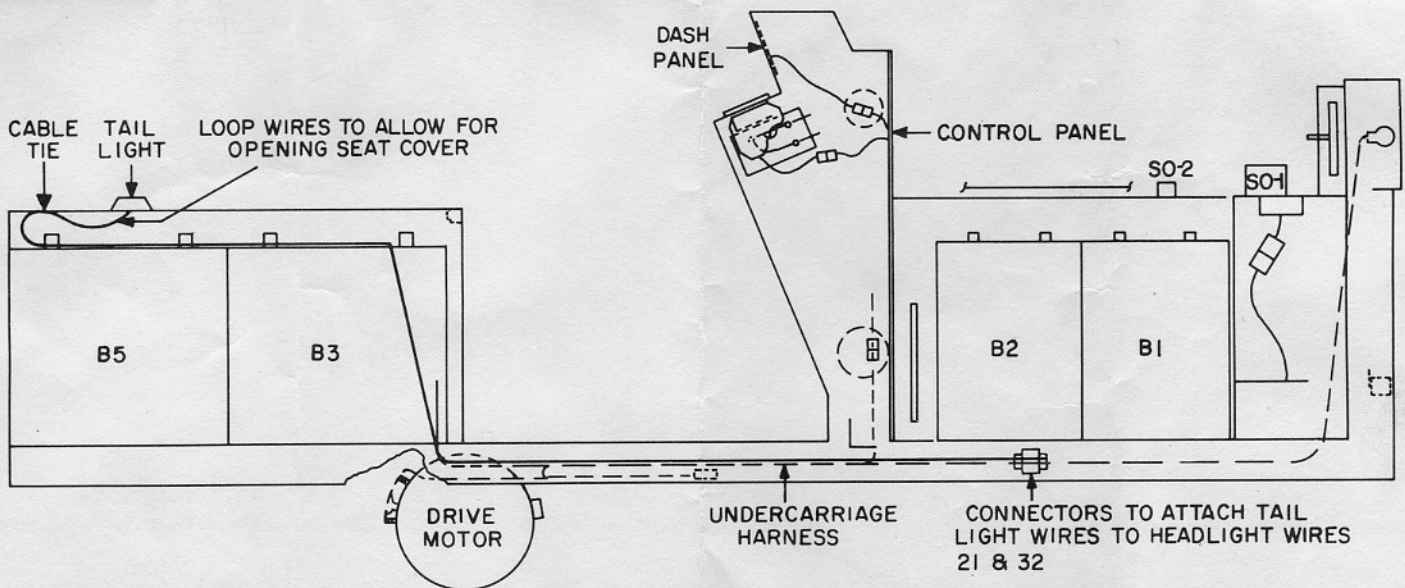


Figure 2

General Electric Company
Outdoor Power Equipment Operation
Corporations Park, Bldg. 702
Schenectady, N. Y. 12305

GENERAL  ELECTRIC

