



# **Elec-Trak<sup>®</sup>**

INDUSTRIAL TRACTOR

## **FORKLIFT ATTACHMENTS**

### **Three low-cost forklift attachments move in on your material handling problems**



Forklift attachments shown without required overhead guard. Guard is sold with forklift and must be installed for use.

### **Attach one to your I-5 Industrial Tractor and raise productivity**

Speed up your material handling with any one of these low-priced forklift attachments. With the forklift power and mobility supplied by the I-5 Elec-Trak<sup>®</sup> industrial tractor, you'll lift 750 pounds and transport it quickly around your plant. The forklift's hydraulic pump, powered by its own electric motor, raises loads on an alloy steel mast with chrome-plated ram. The lift and load rides on eight-inch polyurethane coated steel casters that go easy on your floors. A single level controls the lifting

and lowering (variable speed lowering for gentle placement).

Elec-Trak<sup>®</sup> forklifts also offer you the unique option of front or rear attachment. Interchange is accomplished in minutes. The Elec-Trak<sup>®</sup> forklift attachments are sold with an overhead guard (model CF66) and 200 pounds of counterweights (model CF65). Both the guard and the weights are included in the forklift price.

# Three Low-cost Forklift Attachments...

## Drive in low spaces lift to high places with 92-inch telescoping lift (CF92)

With this lift, placing loads in low overhead clearances is possible because the load is raised at twice the speed of the telescoping mast. Result: the mast extends only 22-inches above the empty forks when they are fully raised. Overall I-5 overhead guard height of 72-inches and mast height of 68-inches allows entry into trailer trucks. The forklift attachment can be removed in minutes, freeing the I-5 Elec-Trak® tractor for other duties.

Rear mounting of the same forklift allows more maneuverability for tight places.



## Lots of lift per dollar with the 74 (CF74)



This fixed-mast forklift attachment puts a 750-pound load more than six feet up but costs less than telescoping lifts. You get the same easy operation, same easy attaching/detaching as with all Elec-Trak® fork lift attachments. An optional barrel-snatching attachment (model CF67) mounts to all the I-5 forklift carriages.



## Compact lift compact price (CF48)

The 48-inch lift has our lowest lift price, but the same 750-pound capacity. The CF48 quickly transports skids around your plant and unloads trucks. Easy to maneuver and easy to store.

## Front to rear mounting is accomplished easily (all forklift models)



Forklift attachment  
front mounted



Driver backs off  
detached forklift



Driver reverses tractor  
position and backs  
onto forklift





Forklift attachment  
rear mounted



LINDSAY BROS. CO.  
400 North First Street  
Minneapolis, Minn. 55401

### FRONT MOUNT DIMENSIONS

(Rear mount dimensions same except for tighter-turning radius)<sup>1</sup>

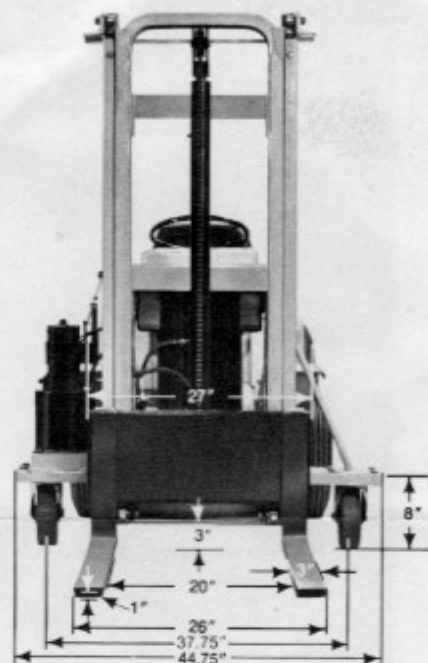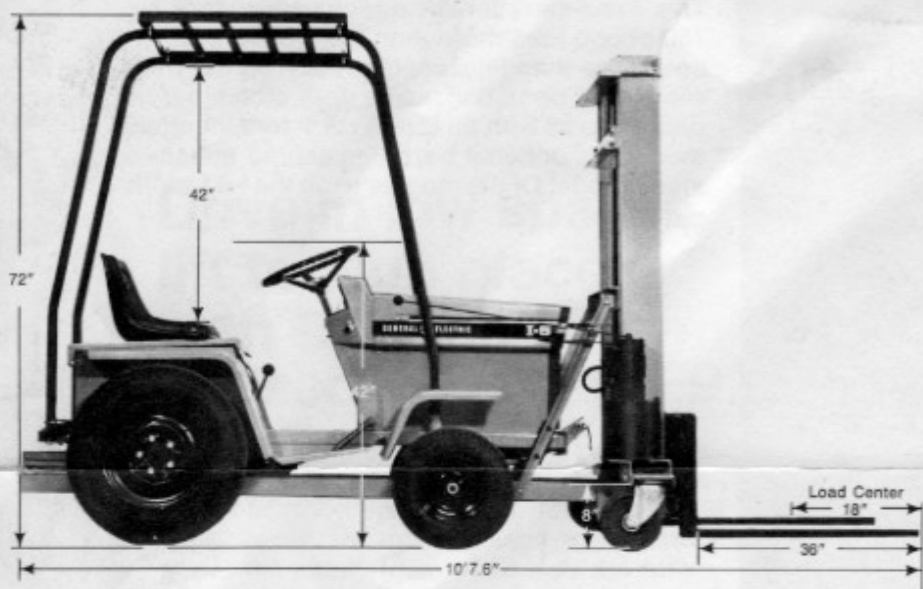

All dimensions are approximate

### SPECIFICATIONS



	CF48	CF74	CF92
Rated Capacity (pounds)*	750	750	750
Fork Height Fully Raised	48"	74"	92"
Mast Height Lowered	68"	94"	68"
Mast Height Raised			114"
Fork Length	36"	36"	36"
Fork Dimensions	3" Wide x 1" Thick		
Load Center	18"	18"	18"
Fork Spread (outside to outside)	26"	26"	26"
Outside Turning Radii (without forks)			
(front mount)	10'	10'	10'
(rear mount)	6'7"	6'7"	6'7"
Inside Turning Radii (rear wheel)	4'0"	4'0"	4'0"
Gradeability With Load (up and down)	18%	18%	18%
Weight with Counterweight (pounds)	720	760	870
Underclearance	3"	3"	3"
Caster Diameter	8"	8"	8"
Lift Speed	24FPM	24FPM	24FPM

<sup>1</sup> I-5 Elec-Trak tractor, attachment specifications and standard equipment are subject to change without notice.

\*200 lb. counterweight system (CF65) required to qualify for 750 lb. rated capacity. Overhead guard (CF66) required as specified in ANSI B56.1.

General Electric Company  
Outdoor Power Equipment Operation  
Corporations Park, Bldg. 702  
Schenectady, N.Y. 12345

GENERAL  ELECTRIC