

- [54] **ROTARY LAWN MOWER DISCHARGE CHUTE SAFETY DEFLECTOR** 3,646,740 3/1972 Grimes..... 56/320.2
 3,648,445 3/1972 Efflandt 56/320.2
 3,706,189 12/1972 Rutherford 56/320.2
 3,729,911 5/1973 Dahl et al. 56/320.2

[75] Inventors: **Douglas R. Houst**, Pattersonville;
Kenneth R. Jones, Elnora, both of
 N.Y.

Primary Examiner—Russell R. Kinsey
Attorney, Agent, or Firm—Dana F. Bigelow; Walter C. Bernkopf

[73] Assignee: **General Electric Company**, Erie, Pa.

[22] Filed: **Apr. 9, 1973**

[21] Appl. No.: **349,556**

[52] U.S. Cl. **56/320.2, 56/13.8, 56/17.5, 56/255**

[51] Int. Cl. **A01d 67/00**

[58] Field of Search **56/320.2, 255, 16.4, 17.4, 56/17.5, 13.6, 13.7, 13.8**

[57] **ABSTRACT**

A V-shaped guard plate is mounted in the mower discharge chute with its vertex toward the inside and its legs diverging toward the front and rear walls of the lateral chute to form side openings to the outside. The resulting pair of diverging paths provide for the conduction of lightweight grass clippings out the side openings but prevent heavier objects such as stones from being discharged to harm surrounding people or property. Further, the plate restricts the operator's accidental access to the blade path portion of the discharge chute.

[56] **References Cited**
UNITED STATES PATENTS

2,898,723	8/1959	Goodall	56/13.6
3,413,783	12/1968	Gordon	56/320.2
3,485,018	12/1969	Beckering et al.	56/13.6
3,503,194	3/1970	Ritums	56/255

7 Claims, 3 Drawing Figures

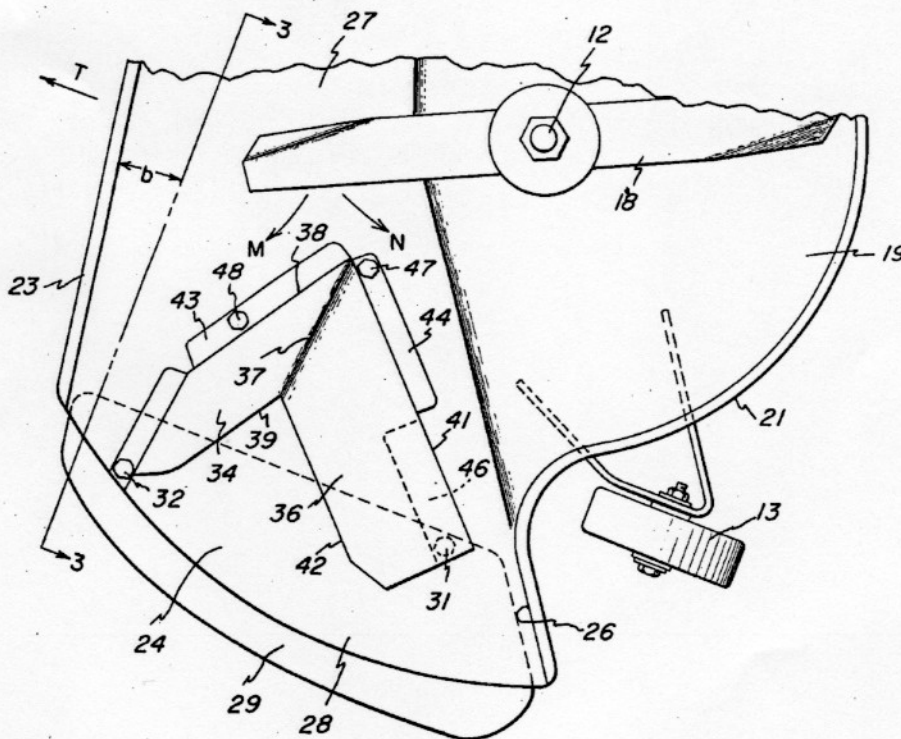


FIG. 1

