

# BRINLY ATTACHMENTS

for use with

## AVCO New Idea Electric Tractors

Equipped with Sleeve Hitch,  
and Manual Lift or  
Electric Lift




### MODEL VV-200 ROTARY TILLER

A quiet, rugged tiller that enables you to prepare seed beds in one step. It is quick and easy to attach; has adjustable mounting—can be centered or offset left or right for cultivating. Tiller aggressiveness is adjustable, for varying ground conditions, with depth control from 1 inch to 6 inches. Tiller is raised and lowered by tractor rear lift. It features four rows of tines, cut width, 30 inches; has torque limiter and circuit breaker for tine and motor protection.

*Requires Mounting Bracket Model VV-201, Rear PTO outlet ; and Electric Rear Lift*

*Order PTO and rear lift from AVCO. Order VV-200 and VV-201 from Brinly-Hardy Co.*

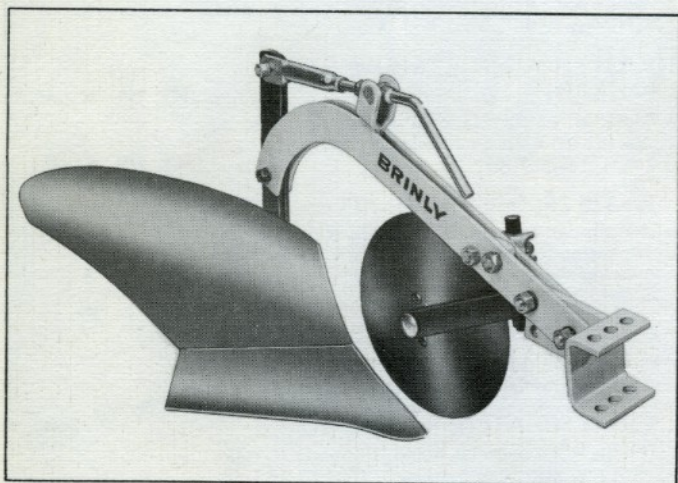

### MODEL PP-510 MOLDBOARD PLOW — 10"

For general plowing at recommended depths of 5 to 6 inches; makes a cut 10" wide. Has 11" rolling coulters which swings out for trash clearance, and contains locking pin to prevent ride-up on shank. Features high moldboard and beam clearance. Has long handle depth crank that can be turned from tractor seat. Hitch clevis at front end of beam provides adjustment for wide tractor tires and different plowing conditions. Correct leveling angle is built into beam assembly. Single pin connects plow to sleeve hitch. Weight, 65 lbs.

*Plow bottom also available in 8-inch (PP-508) and 12-inch (PP-512) sizes. Bottoms mount on same plow beam.*

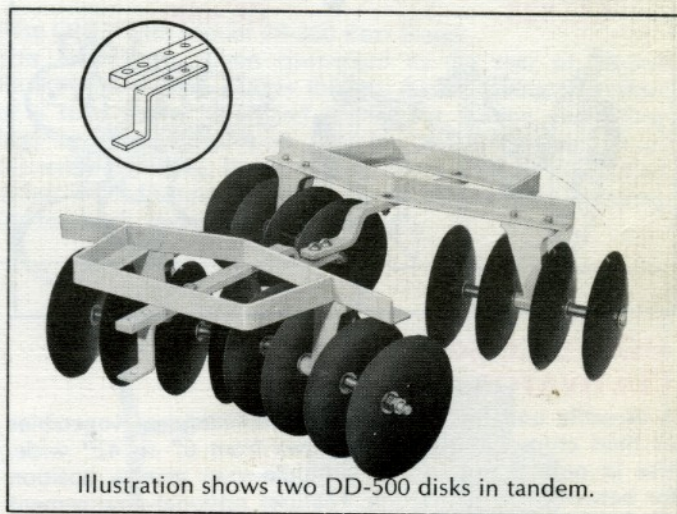


Illustration shows two DD-500 disks in tandem.

### MODEL DD-500 LIFT TYPE DISK HARROW

The basic unit for seed bed preparation and mulching. The DD-500 features a bolted clevis hitch which can be used on tractors equipped with either the sleeve type hitch or a draw bar. Has eight 11" diameter steel disk blades for a cutting width of 29 to 39 inches. Width between the four blade gangs can be adjusted from 1" to 14"; individual disks have a positive angling adjustment of 10, 15 and 20 degrees. Angle weight box holds standard 16" concrete block. Weight, 67 lbs.

*To form a tandem unit, order two DD-500 units and couple together as shown.*

