




Electrak[®]

SNOW THROWER

Owner's Use and Care Manual

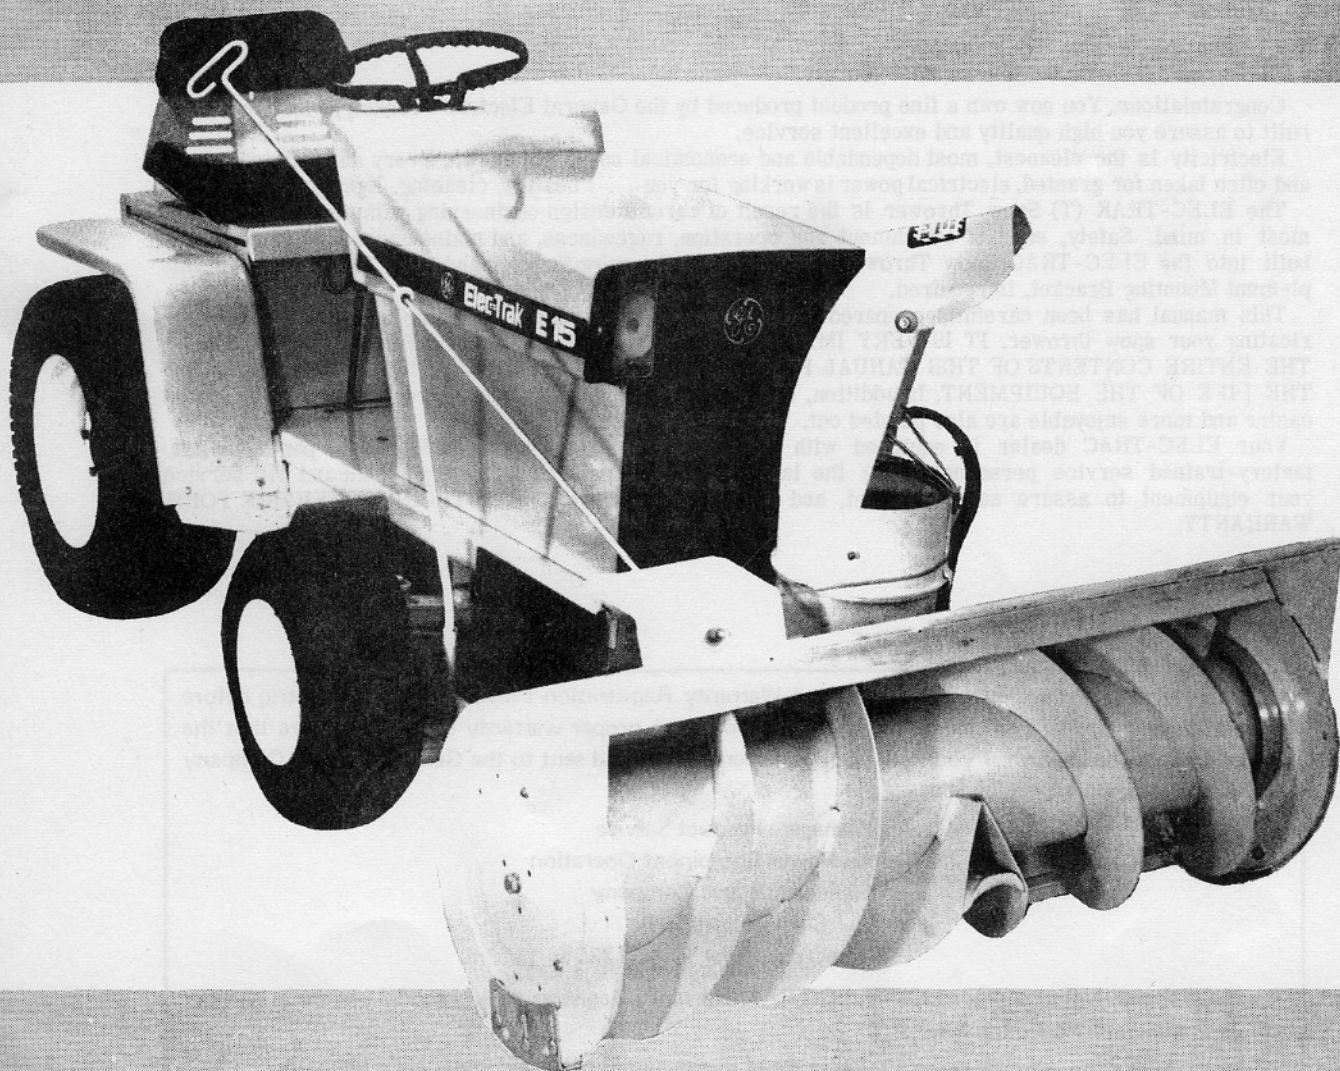

GENERAL  **ELECTRIC**

Table of Contents

INTRODUCTION	2
OPERATION	3-7
OPERATING SUGGESTIONS	6
SERVICE AND MAINTENANCE	7
LUBRICATION	7
ADJUSTMENTS	5-7
CLEANING	7
STORAGE	7
WARRANTY	8

Congratulations. You now own a fine product produced by the General Electric Company, which has been built to assure you high quality and excellent service.

Electricity is the cleanest, most dependable and economical source of power. Every day, all around you and often taken for granted, electrical power is working for you . . . heating, cleaning, lighting, and cooling.

The ELEC-TRAK (T) Snow Thrower is the result of careful design engineering with the operator foremost in mind. Safety, ease of attachment and operation, ruggedness, and maintenance free features are built into the ELEC-TRAC Snow Thrower. To complete the snow thrower and make it operable, the Implement Mounting Bracket, is required.

This manual has been carefully prepared to instruct you in attaching, operating, maintaining, and lubricating your snow thrower. IT IS VERY IMPORTANT THAT EACH OPERATOR FULLY UNDERSTANDS THE ENTIRE CONTENTS OF THIS MANUAL FOR SAFE, DEPENDABLE OPERATION AND TO PROLONG THE LIFE OF THE EQUIPMENT. In addition, many tips and suggestions that make use of this attachment easier and more enjoyable are also pointed out.

Your ELEC-TRAC dealer is equipped with a complete stock of genuine ELEC-TRAC parts. He has factory-trained service personnel using the latest approved test and repair equipment and will service your equipment to assure safe, efficient, and economical operation. UNAUTHORIZED SERVICE VOIDS WARRANTY.

WARRANTY REGISTRATION

Your dealer must complete and submit a Warranty Registration Form to General Electric before your Warranty Registration can be sent to you. To assure proper warranty coverage be sure that the dealer prepares this form for you with a copy properly dated and sent to the General Electric Company at the address shown below.

Manager—Product Service
Outdoor Power Equipment Operation
General Electric Company
Corporations Park
Schenectady, New York 12305

Your dealer will also record the ELEC-TRAK Warranty Registration and model and serial number of your General Electric tractor.

Remember to specify model and serial number shown under the hood when ordering parts.

This manual does not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purpose, the matter should be referred to your authorized Elec-Trac dealer.

SAFETY PRACTICES

As with all power devices, prime responsibility for safe operation of the equipment rests with the operator. It is necessary that both operating instructions and the following safety information be fully understood by each operator *before* using the tractor and attachments.

- Become familiar with the location and function of all controls.
- Be sure the work area is clear of objects which might be picked up and thrown.
- Regulate travel speed according to ground conditions.
- Don't forget to set the brake and shut off attachment power before you leave the tractor.
- Don't drive too close to creeks or ditches.
- Watch out for traffic when near roadways.
- Stay alert for holes and other hidden hazards.
- Watch where you're driving! Pay attention!
- Beware on steep slopes! Reduce speed on all side slopes and sharp turns to prevent tipping or losing control.
- Don't attempt to operate tractor when not in seat.
- Don't carry passengers.
- Keep children and pets at a safe distance.
- Don't wear loose-fitting clothing that might get caught in moving parts.
- Never attempt to get off the tractor while it is in motion.
- Don't stop or start suddenly when going uphill or downhill.
- Keep tractor in good operating condition.
- Remove key before leaving tractor.
- Plug tractor charger cord into a normal 110 volt, 3-hole receptacle. Do not use a 2-hole adapter unless properly grounded.
- Keep hands and feet clear of all rotating equipment.
- Disconnect power cord from PTO receptacle before handling power attachments.
- All safety devices are for your protection. Do not attempt to defeat them.

OPERATION INITIAL USE

Prior to initial use of the ELEC-TRAC Snow Thrower, the user should completely familiarize himself with all tractor controls. This information and general attachment operating information is found in your Tractor Use and Care Manual. Refer to your manuals often.

Before using the snow thrower, be sure the power pack is fully charged. If you are able to anticipate heavy snow removal, place the power pack on charge several hours before use to assure peak efficiency.

GROUND SPEED

All snow throwing, with the exception of the very lightest snow falls, should be done with the range selector in the lowest range (LL). This prevents overloading the auger which in turn could reduce power pack range and hinder snow discharge.

BEFORE PLACING AUGER INTO OPERATION

1. Check all screws and nuts for proper tightness and that all parts are properly assembled.
2. Test all controls for smooth operation.

The right and left hand side of the tractor or snow thrower is identified when facing forward on the tractor seat.

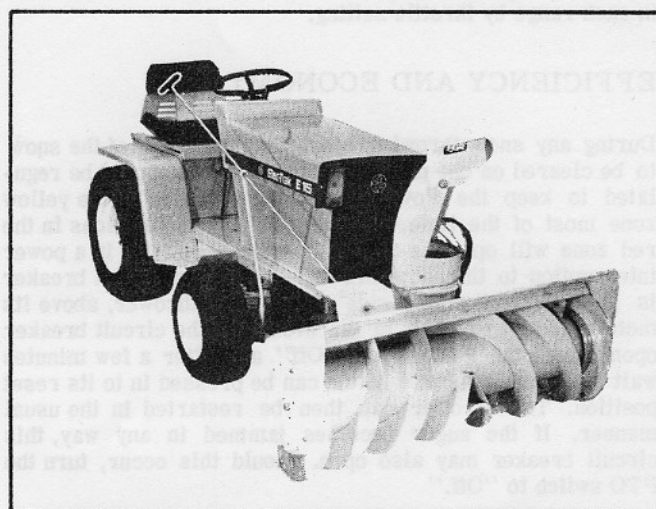


FIGURE 1 ELEC-TRAC SNOW THROWER



WARNING: Before leaving the tractor for any reason, turn PTO and key switch to "Off."



OPERATION

SNOW THROWER STARTING

Place the snow thrower at the desired height and then start its motor by sitting on the tractor seat and turning the key switch "On," and turning the PTO switch to "Off" then "On." An electrical interlock prevents the snow thrower motor from starting if this procedure is not followed. Should the operator leave the seat or turn the key switch to "Off," another interlock interrupts attachment power. For all normal use, the PTO switch should be used to turn the snow thrower on and off. To restart, the PTO switch must be turned to "Off" and then "On." Refer to your tractor manual.

TRANSPORTING

Before transporting the snow thrower, use the lift to raise it to its maximum height, so solid contact is made with the underside of the tractor's front bumper. This prevents unnecessary bounce on the lift belt.

DISCHARGE CHUTE CONTROL

Position of the chute is easily changed from the tractor seat by rotating the crank on the right side of the tractor.

The discharge chute position can be varied in a 270 degree arc to accommodate snow removal conditions. See Fig. (6).

In removing light to heavy snow, snow throwing should be done in LL range. Under some conditions, with lighter snow and smoother ground surfaces, it is possible that you may wish to operate in range L. Remember, for a good job, take a few minutes more and do it right.

FORWARD AND REVERSE MOVEMENT DURING SNOW REMOVAL

Your Elec-Trac Tractor has instantaneous forward and reverse speed control; however, do not change drive selector from one range to another while moving - speed can be varied in each range by throttle setting.

EFFICIENCY AND ECONOMY

During any snow throwing operation, the width of the snow to be cleared on one pass and forward speed should be regulated to keep the Power Use Gage indicator in the yellow zone most of the time. Continued use with indications in the red zone will open the circuit breaker and result in a power interruption to the snow thrower motor. The circuit breaker is located on the left side of the snow thrower, above its motor. See Figure (4). In the event that the circuit breaker opens, turn the PTO switch "Off" and after a few minutes wait for cooling, the red button can be pressed in to its reset position. The thrower can then be restarted in the usual manner. If the auger becomes jammed in any way, this circuit breaker may also open. Should this occur, turn the PTO switch to "Off."



WARNING: Remove the power cord from the PTO receptacle before attempting to remove an obstruction or when handling the snow thrower for any purpose.

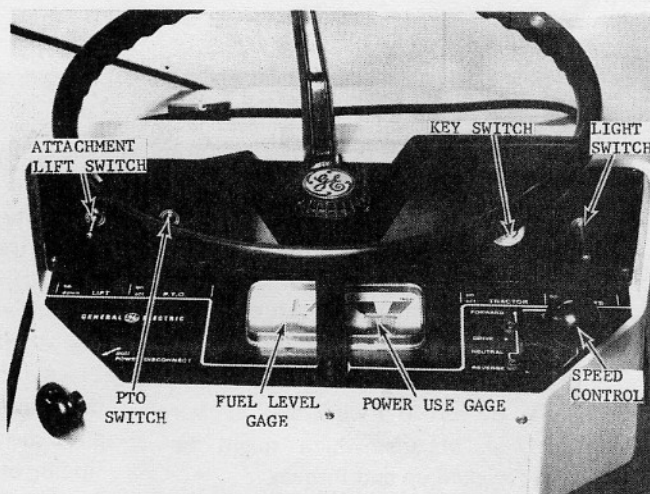


Figure 2

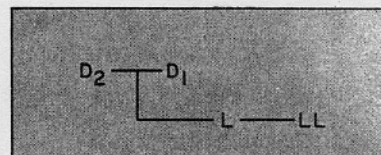


Figure 3 Range Selector Diagram

Designation	Use
LL - Low-Low (Up to 0.8 mph)	Snowblowing Tilling Ground Engaging Attachments
L - Low (Up to 2.6 mph)	Cultivating Ground Engaging Attachments

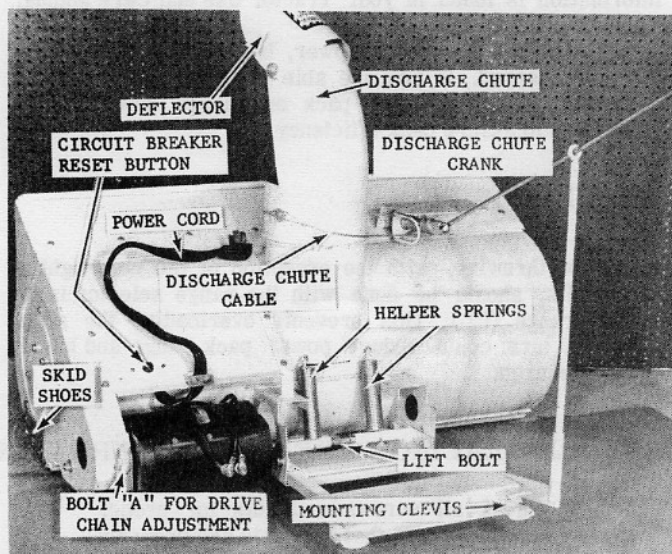


Figure 4

DISCHARGE CHUTE DEFLECTOR

The deflector mounted on the top of the discharge chute determines the distance snow is thrown. Moving the top of the deflector down decreases the distance of throw and raising it increases the distance of throw. See Fig. (4).

WARNING: Turn PTO switch off and remove power cord from PTO receptacle before making deflector adjustments.



CAUTION



When making skid shoe or elbow drive tube adjustment, shut attachment drive motor off.

The powered lift has a thermal overload protector and also a fuse located on left-hand side (near front of dash) - see tractor instruction manual for details on replacement.

SKID SHOES

The skid shoes mounted on each side of the auger housing, adjust the distance the auger housing is raised above the working surface. When removing snow from a gravel driveway or any uneven surface, it is advisable to keep the housing above the surface to prevent possible damage to the auger. On black top or concrete, minimum height should be used.

To adjust the skid shoes, remove the power cord from the PTO receptacle and raise the snow thrower a few inches off the ground and place blocks under Snow Thrower housing to support Snow Thrower. Loosen the six nuts securing the skid shoes to the auger housing (three on each side) and move them to the desired position before retightening the nuts. The front part of the shoe should be slightly higher than rear part of shoe. Adjust both sides to the same height to keep the auger level. See Fig. (5).

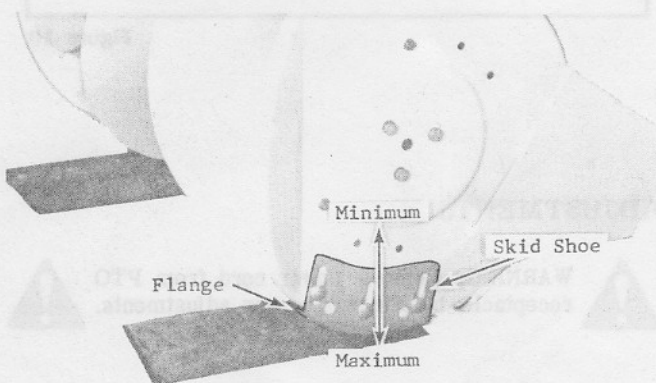



Figure 5

ELBOW DRIVE TUBE ADJUSTMENT

If elbow will not hold its position and tends to rotate, adjust lock nut on end of elbow drive tube eye bolt. Tighten lock nut 1/8 turn and check rotation of drive tube by turning elbow crank. A small amount of resistance should be encountered, if elbow still tends to rotate, repeat adjustment. Do not overtighten nut, tighten until elbow holds its position.



Do not remove any guards or covers while operating Tractor Thrower.

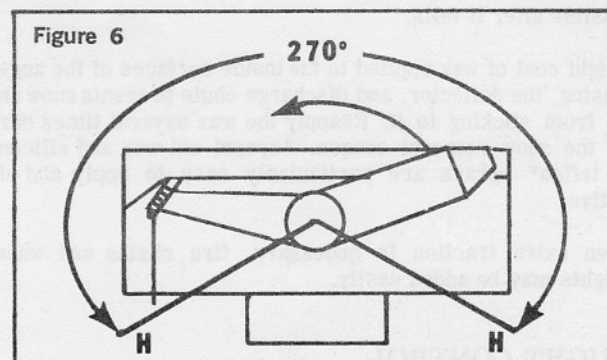

Snow Thrower chute has a discharge radius of 270 degrees by turning the rod crank. Chute stop bolt should stop it from exceeding discharge points (H).

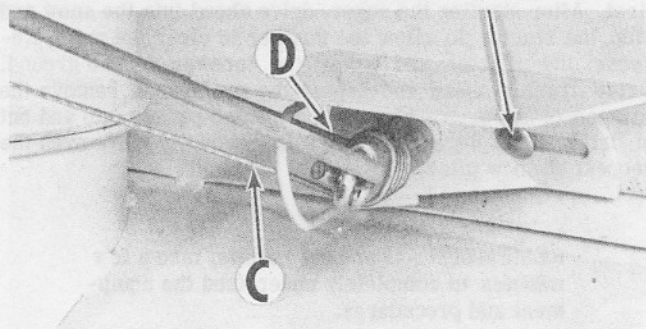


Figure 7

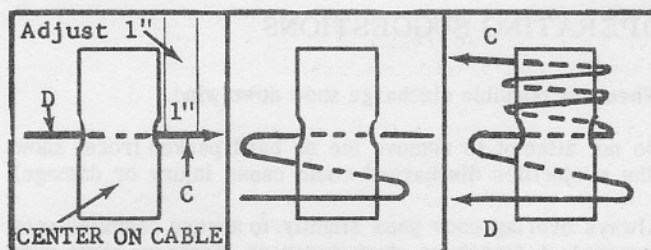


Figure 8

Cable lead (C) should be 2" longer than cable lead (D). If cable leads are not set in this manner, unwrap cable from cable tube until cable unwinds on cable tube. Loosen wrap of cable and lengthen proper end of cable 1" (Fig. 8) or to allow proper angle of discharge spout. This should allow equal angle both ways.

CLEAN AREA

Before the first snowfall, the area in which snow removal is to take place should be cleared of all stones, sticks, etc., which might be picked up by the auger.

Mark any obstacles which might become hidden by snow to prevent driving tractor and auger into them.

OPERATION

Operate the tractor and snow thrower in a clear area, first before removing snow. The more familiar you become with the snow thrower, the better results you will have in its use.

Best results are obtained when snow is removed as soon as possible after it falls.

A light coat of wax applied to the inside surfaces of the auger housing, the deflector, and discharge chute prevents snow and ice from sticking to it. Reapply the wax several times during the snow removal season. Aerosol ski wax and silicone or teflon* sprays are particularly easy to apply and effective.

When extra traction is necessary, tire chains and wheel weights may be added easily.

HEIGHT CONTROL

Normal operation of the snow thrower is with the skid shoes resting on the working surface, but in extremely deep snow the thrower can be fully raised to remove top layers of snow first. After starting the auger, drive ahead into the snow and stop the tractor to allow the thrower to clear the snow. Reverse the tractor and lower the thrower to the ground. Drive tractor ahead and repeat the process to remove the balance of snow. Working with repeated passes into and out of drifts at 45 degree angles will eventually move even the deepest of snow piles.

REMEMBER - For best results, take a few minutes to completely understand the equipment and procedures.

OPERATING SUGGESTIONS

Whenever possible discharge snow down wind.

Do not attempt to remove ice or hard packed frozen snow. (the projectiles discharged could cause injury or damage).

Always overlap each pass slightly to assure complete snow removal. A frozen or stuck auger or discharge chute must be loosened or thawed with care.

DO NOT attempt to free auger by turning the started motor on and off more than once or twice and do not leave a started motor on for more than a moment.



WARNING: Before attempting to free any part remove the power cord from the PTO receptacle.

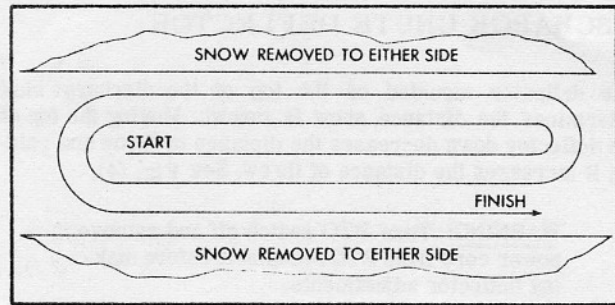


Figure 9

A definite pattern of operation is required to thoroughly clean the snow area. This pattern will avoid a second removal of snow and avoid throwing snow in unwanted places. Where it is possible to throw snow to right and left, as on a long driveway, it is advantageous to start in the middle. Plow from one end to the opposite end throwing snow to both sides without changing direction of the discharge chute. See Figure (9). If snow can only be thrown to one side of the driveway or sidewalk, start at the opposite side. At the end of each pass, rotate the discharge chute 180 degrees for the return pass. At the end of each succeeding pass, rotate chute 180 degrees to maintain direction of throw into the same area. See Figure 10.

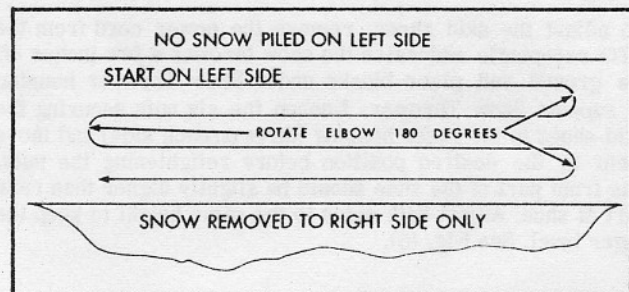


Figure 10

ADJUSTMENTS



WARNING: Remove power cord from PTO receptacle before making any adjustments.



* Trademark - Dupont Company

AUGER DRIVE CHAIN

Periodically check auger drive chain for proper tension. It is important that correct tension be maintained to obtain maximum chain life.

When the tension is adjusted correctly, the roller chain will have about 1/4" depression from a tight position.

If adjustment is necessary, loosen bolt "A" in Figure (11) and hold motor down to increase tension or up to reduce tension while retightening bolt "A."

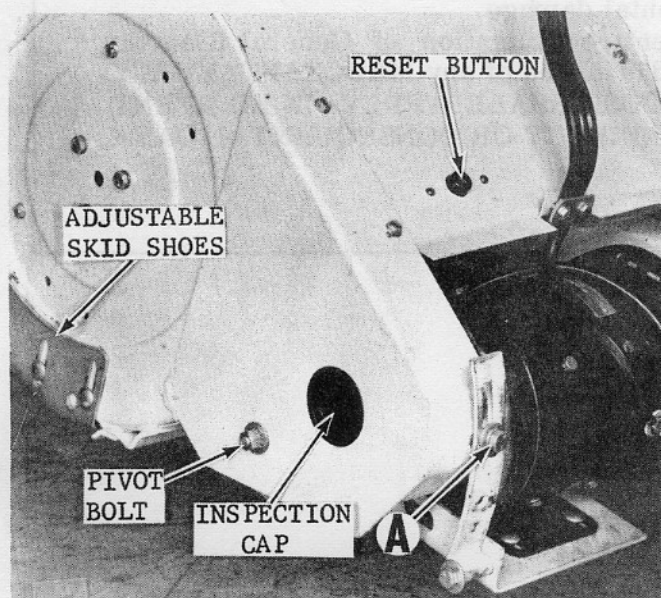


Figure 11

SCRAPER BLADE AND SKID SHOES

Both the scraper blade and skid shoes are subject to wear and are designed to be readily replaceable. Replace before wear is excessive so as not to damage the auger housing.

SAFETY SUGGESTIONS

SEE PAGE 3

SNOW THROWER REMOVAL

Drive the tractor so the snow thrower is as close as possible to the place where it is to be stored.

Remove power cord from the PTO receptacle and follow the installation procedure in the reverse order.

STORAGE

At the end of the snow season, the following steps are recommended:

1. Remove snow thrower from the tractor.
2. Wash off any salt deposit which may have dried on the exposed surfaces. Paint or cover exposed metal with a light coat of oil.
3. Lubricate the snow thrower as outlined in the Service and Maintenance section.
4. Store thrower in a dry place.

Lubricate these points before each operation

SERVICE AND MAINTENANCE LUBRICATION

Lubricate these points before each operating season and as required during the season with a good grade of 30 weight machine oil or grease as required.

1. Discharge chute/stack connection-grease fitting.
2. Auger drive chain: Lubricate roller chain every 10 operating hours. It is very important that oil reaches inside each roller. Wipe off excess oil from chain.
3. Pivot and friction points: To maintain smooth and free operation, apply a few drops of oil as required to all pivot and friction points.

The auger and motor bearings are self-lubricating and no additional lubrication is required.

WARRANTY

General Electric Company warrants that it will repair or replace without charge, f.o.b. factory, any part of the ELEC-TRAC snow thrower with which this warranty is furnished which proves to be defective in material or workmanship within 12 months in ordinary home use (3 months if in commercial or institutional use) following the date of sale to the original purchaser for use. This does not apply to any repair or replacement made necessary by improper use or maintenance, or by abuse or accidental damage.

The foregoing warranty states the entire obligation of General Electric Company with respect to said products and is in lieu of any MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE SHALL APPLY. IN NO EVENT WILL THE COMPANY BE LIABLE FOR INDIRECT OR CONSEQUENTIAL DAMAGES.

OUTDOOR POWER EQUIPMENT OPERATION
CORPORATIONS PARK
SCHENECTADY, N.Y. 12305

GENERAL  ELECTRIC